

UNDERMOUNT
SLIDE SERIES

MAGIC-MOVE



Global Quality Benchmark

MAGIC-MOVE

Soft-close, synchronization, silent system

Perfect Motion for Drawers



- DTC Magic-Move Soft-close Undermount Slides, full extension with integrated synchronization silent system.
- 3D adjustment - First Choice for Quality kitchen cabinets and wardrobes.
- Dynamic Loading Capacity: 40/60kg



Quietness



Intelligence



Durability



Eco-Friendliness




PRODUCT



DESCRIPTION

- Load capacity: 40kg
- Finish: zink plated
- Length: 250-600mm, full extension
- Silent system guarantees smooth run without noise
- 2D adjustment, up&down: 0-2.5mm, side: ± 1.5 mm
- 3D adjustment, up&down: 0-2.5mm, side: ± 1.5 mm, depth: 0-3mm

SPACE REQUIREMENT

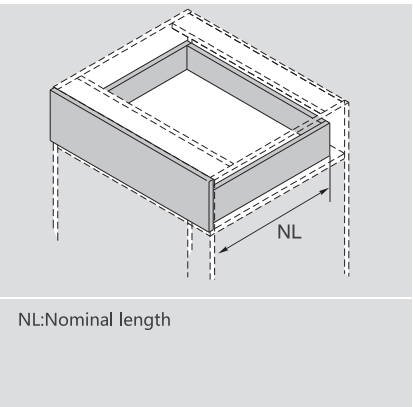


NL:Nominal length

PLANNING

Installation Dimensions(mm)


NL=Nominal Slide Length
LT=Internal Cabinet Depth
LT=NL+3

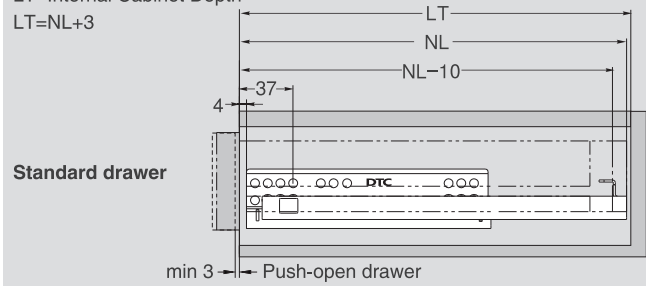

Standard drawer

min 3 Push-open drawer

NL=Nominal Slide Length
LT=Internal Cabinet Depth
LT=NL+21

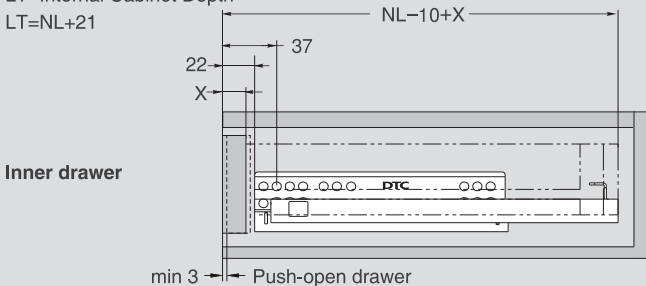

Inner drawer

min 3 Push-open drawer

SOFT CLOSE DRAWER/PUSH-OPEN DRAWER



1

Slides (left/right)


Pre-zinc Steel (F02)

NL	 Soft close item No.	Set/ctn	 Push-open item No.	Set/ctn
250mm	TS10250H	10	TF10250H	6
270mm	TS10270H	10	TF10270H	6
300mm	TS10300H	10	TF10300H	6
320mm	TS10320H	10	TF10320H	6
350mm	TS10350H	10	TF10350H	6
380mm	TS10380H	10	TF10380H	6
400mm	TS10400H	10	TF10400H	6
420mm	TS10420H	10	TF10420H	6
450mm	TS10450H	10	TF10450H	6
480mm	TS10480H	10	TF10480H	6
500mm	TS10500H	10	TF10500H	6
520mm	TS10520H	10	TF10520H	6
550mm	TS10550H	10	TF10550H	6
600mm	TS10600H	10	TF10600H	6

2D Locking Device (Left/Right)	
Grey(H11)	
Item No.	0TSD01-A
2 3D Locking Device (Left/Right)	
Grey(H11)	
Item No.	0TSD02-A
3 Rod for Push-open Synchronization (For cutting to size,1100mm. Cutting:Internal cabinet width LW-172)	
Silver Grey(E18)	
Item No.	HT0FH02

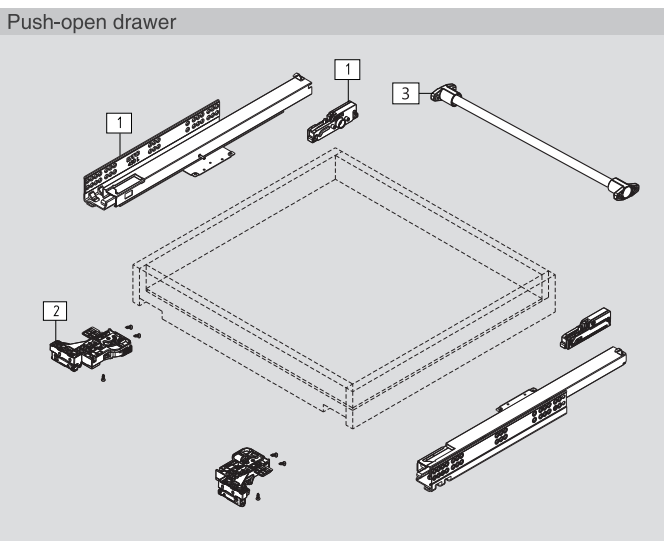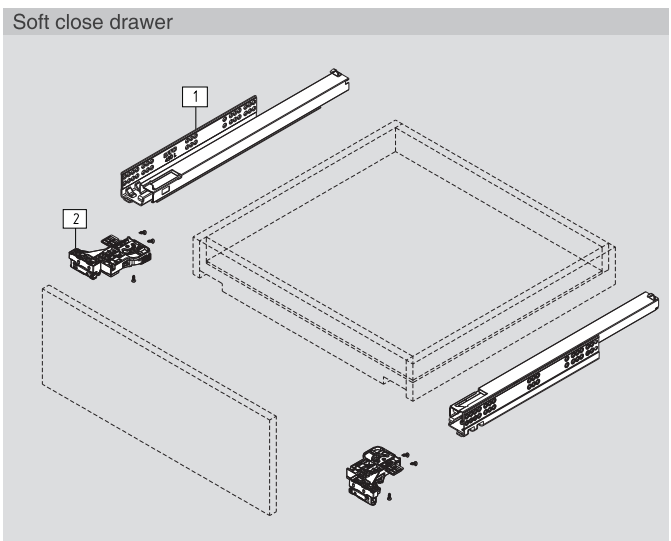


Screw Positions of the Slides(mm)

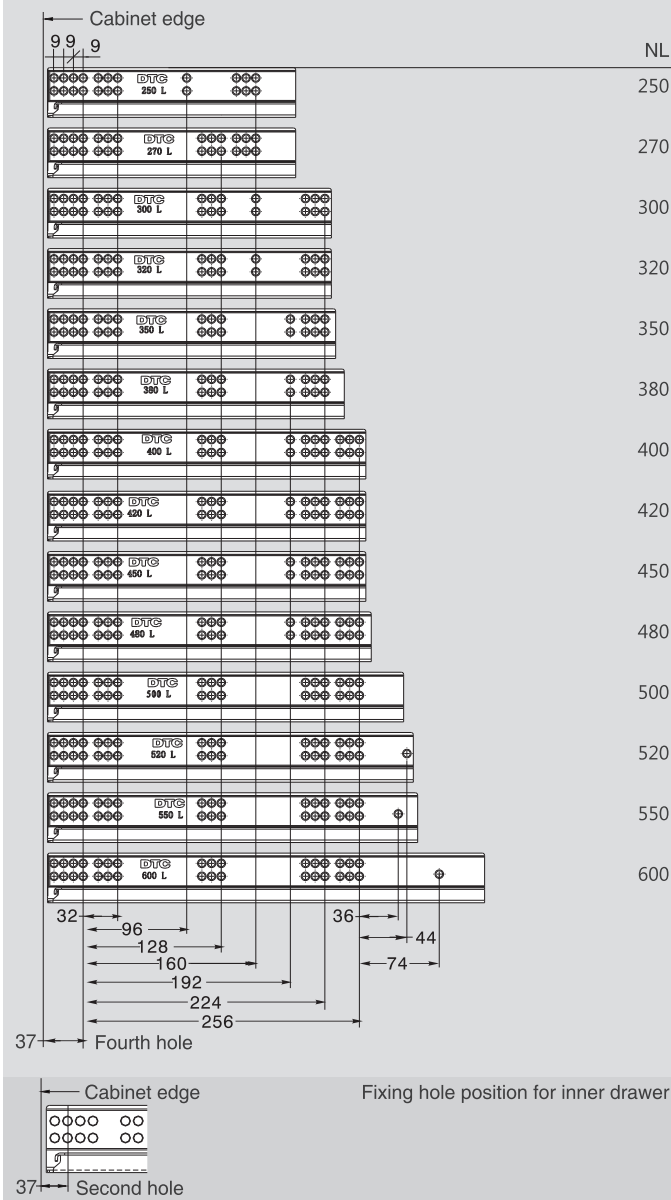


Installation Dimensions(mm)

SKW=Internal Drawer Width
LW=Internal Cabinet Width

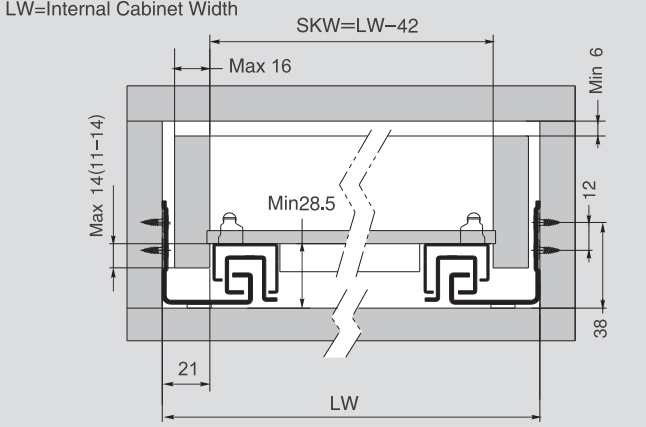


Drawer Back Preparation(mm)

Soft close drawer




Push-open drawer




Locking Device Installation(mm)

2D Locking Device



3D Locking Device



MAGIC-MOVE

TS80 Series Synchronized Series Full Extension Undermount Slides with Locking Device




PRODUCT



DESCRIPTION

- Load capacity: 40kg
- Finish: zink plated
- Length: 250-600mm, full extension
- Silent system guarantees smooth run without noise
- 2D adjustment, up&down:0-2.5mm, side:± 1.5mm
- 3D adjustment, up&down:0-2.5mm, side:± 1.5mm, depth: 0-3mm

SPACE REQUIREMENT

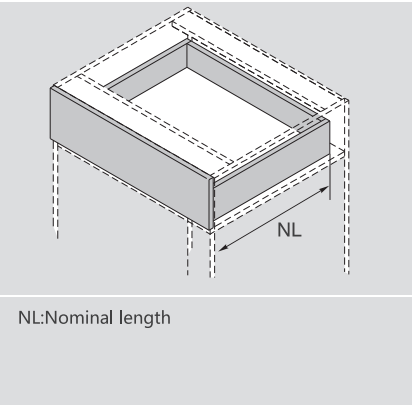


NL:Nominal length

PLANNING

Installation Dimensions(mm)


NL=Nominal Slide Length
LT=Internal Cabinet Depth
LT=NL+3

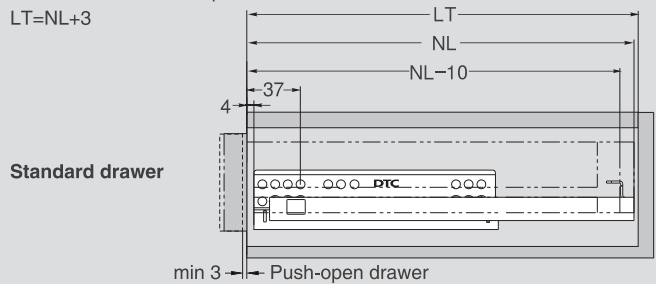

Standard drawer

min 3 Push-open drawer

NL=Nominal Slide Length
LT=Internal Cabinet Depth
LT=NL+21

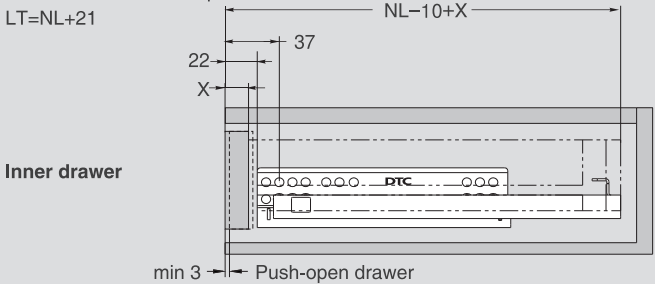


Inner drawer

min 3 Push-open drawer


SOFT CLOSE DRAWER/PUSH-OPEN DRAWER

1	Slides (left/right)					
	Pre-zinc Steel (F02)					
	NL	Soft close item No.	Set/ctn	Push-open item No.	Set/ctn	
	250mm	TS80250H	10	TF80250H	6	
	270mm	TS80270H	10	TF80270H	6	
	300mm	TS80300H	10	TF80300H	6	
	320mm	TS80320H	10	TF80320H	6	
	350mm	TS80350H	10	TF80350H	6	
	380mm	TS80380H	10	TF80380H	6	
	400mm	TS80400H	10	TF80400H	6	
	420mm	TS80420H	10	TF80420H	6	
	450mm	TS80450H	10	TF80450H	6	
	480mm	TS80480H	10	TF80480H	6	
	500mm	TS80500H	10	TF80500H	6	
	520mm	TS80520H	10	TF80520H	6	
	550mm	TS80550H	10	TF80550H	6	
	600mm	TS80600H	10	TF80600H	6	

2	2D Locking Device (Left/Right)	
	Grey(H11)	
	Item No.	0TSD01-A
2	3D Locking Device (Left/Right)	
	Grey(H11)	
	Item No.	0TSD02-A
3	Rod for Push-open Synchronization (For cutting to size,1100mm. Cutting:Internal cabinet width LW-180)	
	Silver Grey(E18)	
	Item No.	HT0FH02

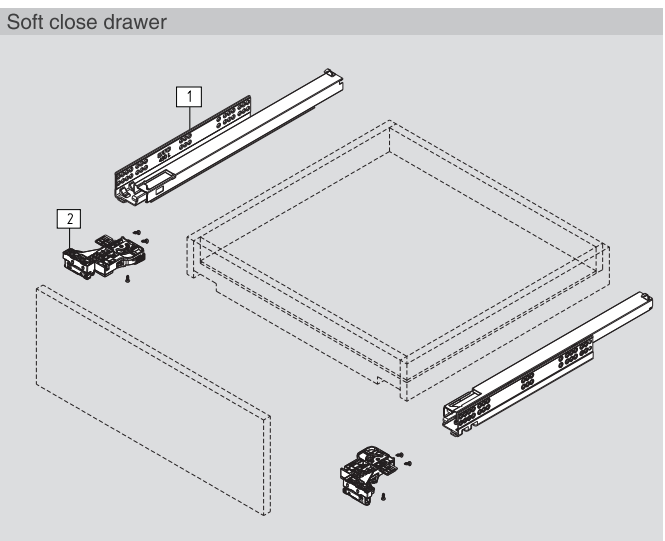

Soft close drawer

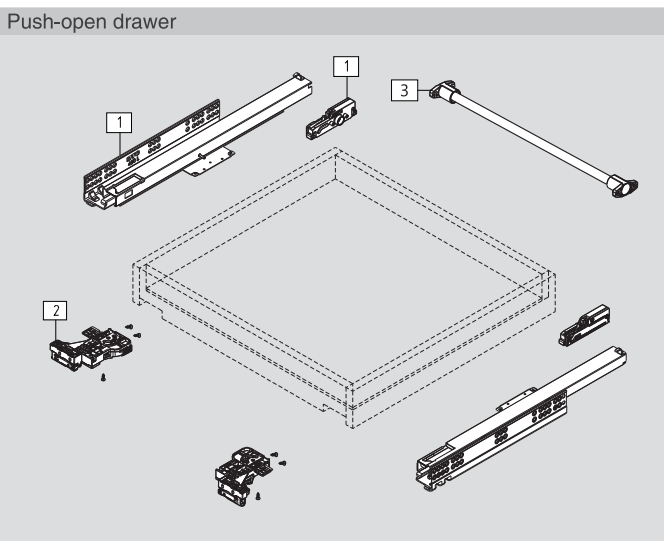


Push-open drawer

Screw Positions of the Slides(mm)




Installation Dimensions(mm)


SKW=Internal Drawer Width
LW=Internal Cabinet Width

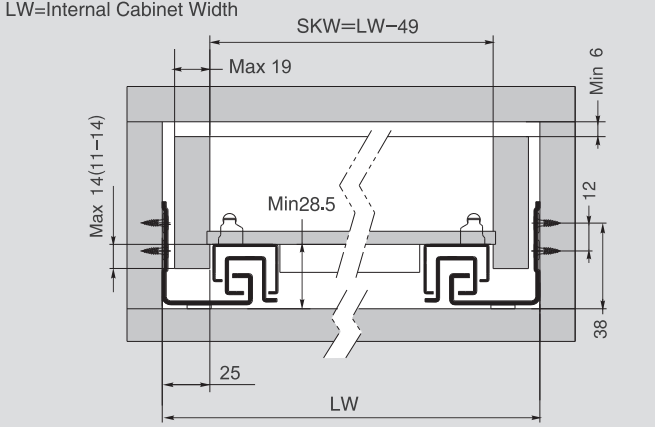

Drawer Back Preparation(mm)

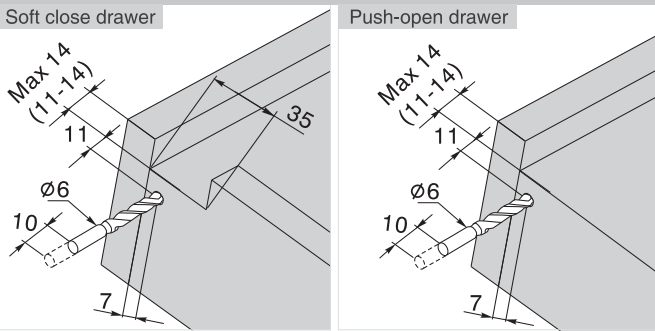

Locking Device Installation(mm)

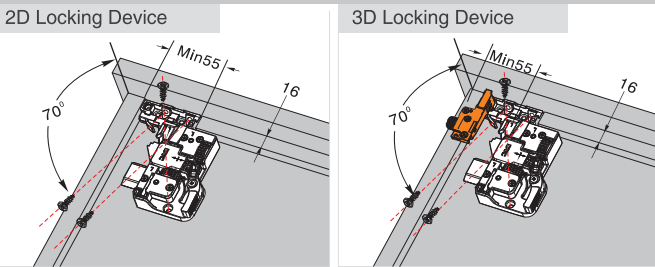




PRODUCT



DESCRIPTION

- Load capacity: 60kg
- Finish: zink plated
- Length: 450-750mm, full extension
- Silent system guarantees smooth run without noise
- 2D adjustment, up&down: 0-2.5mm, side: ± 1.5 mm
- 3D adjustment, up&down: 0-2.5mm, side: ± 1.5 mm, depth: 0-3mm

SPACE REQUIREMENT

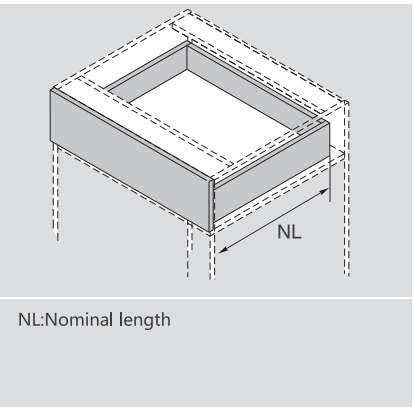


NL:Nominal length

PLANNING

Installation Dimensions(mm)


NL=Nominal Slide Length
LT=Internal Cabinet Depth
LT=NL+3

Standard drawer

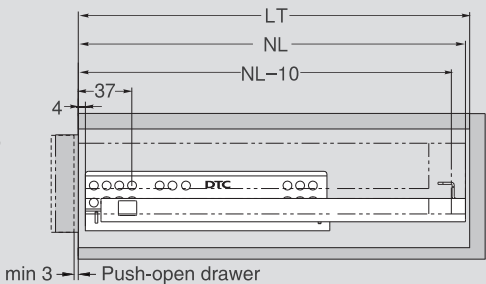

NL=Nominal Slide Length
LT=Internal Cabinet Depth
LT=NL+21

Inner drawer

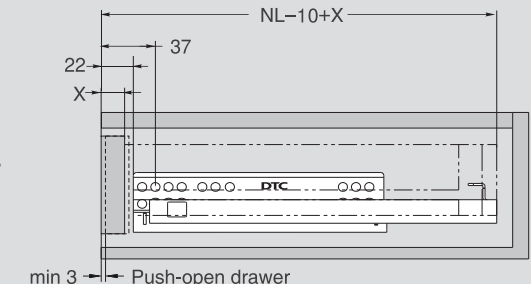

SOFT CLOSE DRAWER/PUSH-OPEN DRAWER

1





Slides (left/right)



Pre-zinc Steel (F02)

NL	 Soft close item No.	Set/ctn	 Push-open item No.	Set/ctn
450mm	TS11450H	10	TF11450H	6
480mm	TS11480H	10	TF11480H	6
500mm	TS11500H	10	TF11500H	6
520mm	TS11520H	10	TF11520H	6
550mm	TS11550H	10	TF11550H	6
580mm	TS11580H	10	TF11580H	6
600mm	TS11600H	10	TF11600H	6
650mm	TS11650H	10	TF11650H	6
700mm	TS11700H	10	TF11700H	6
750mm	TS11750H	10	TF11750H	6

2D Locking Device (Left/Right)	
Grey(H11)	
Item No.	0TSD01-A
2	
3D Locking Device (Left/Right)	
Grey(H11)	
Item No.	0TSD02-A
3	
Rod for Push-open Synchronization (For cutting to size,1100mm. Cutting:Internal cabinet width LW-172)	
Silver Grey(E18)	
Item No.	HT0FH02

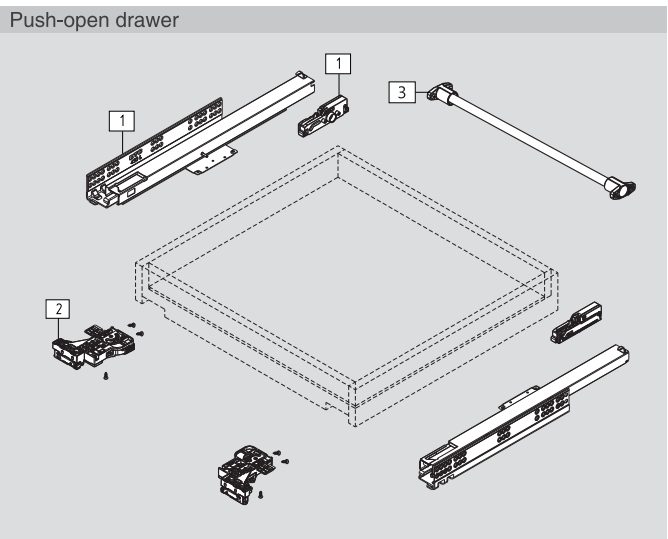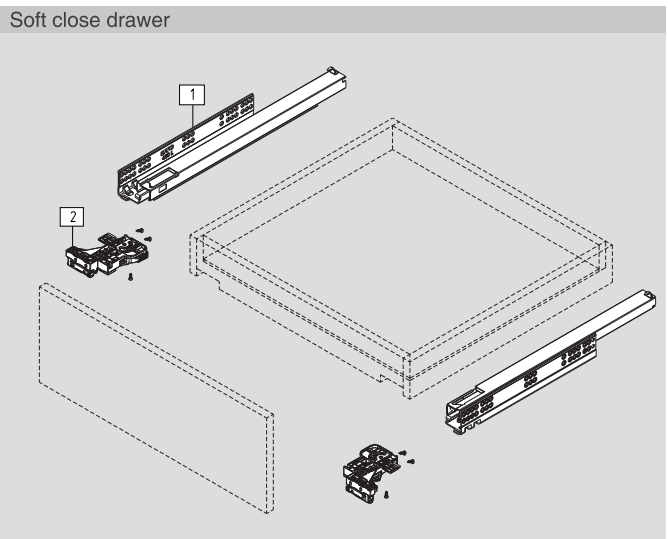


Screw Positions of the Slides(mm)

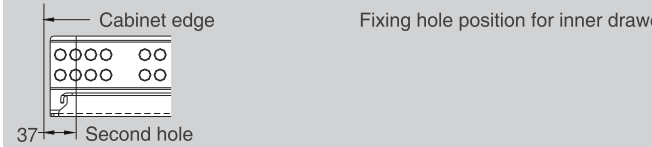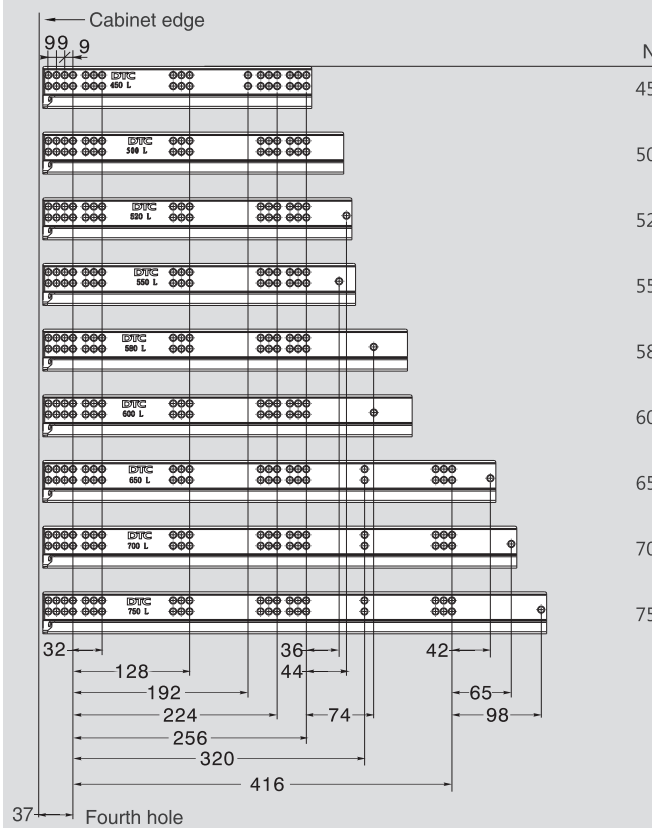


Installation Dimensions(mm)

SKW=Internal Drawer Width
LW=Internal Cabinet Width

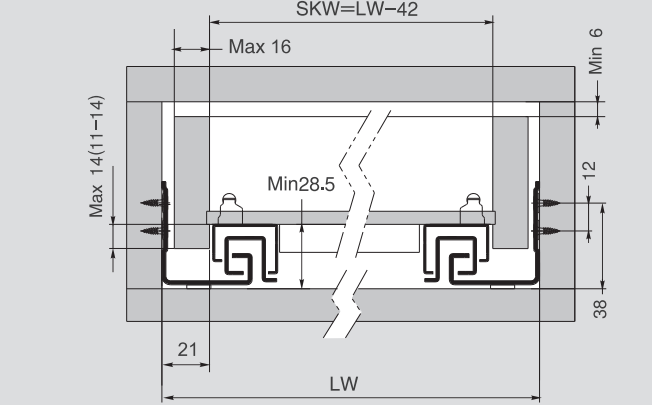


Drawer Back Preparation(mm)

Soft close drawer




Push-open drawer




Locking Device Installation(mm)

2D Locking Device



3D Locking Device






PRODUCT



DESCRIPTION

- Load capacity: 60kg
- Finish: zink plated
- Length: 450-750mm, full extension
- Silent system guarantees smooth run without noise
- 2D adjustment, up&down:0-2.5mm, side:± 1.5mm
- 3D adjustment, up&down:0-2.5mm, side:± 1.5mm, depth: 0-3mm

SPACE REQUIREMENT

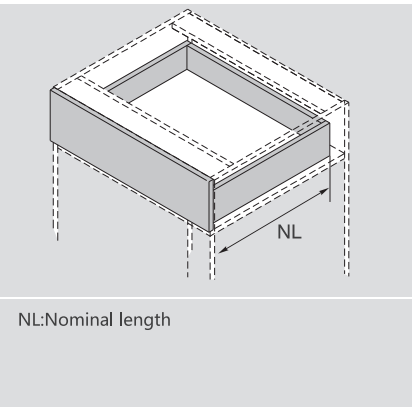


NL:Nominal length

PLANNING

Installation Dimensions(mm)


NL=Nominal Slide Length
LT=Internal Cabinet Depth
LT=NL+3

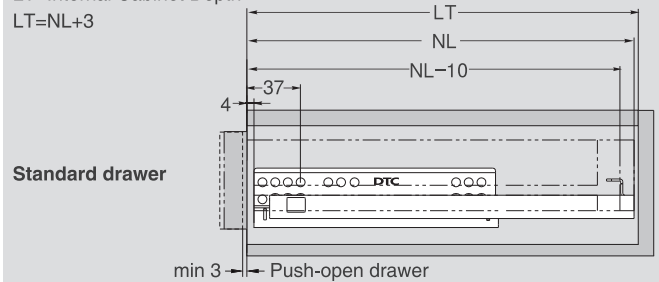

Standard drawer

min 3 → Push-open drawer

NL=Nominal Slide Length
LT=Internal Cabinet Depth
LT=NL+21

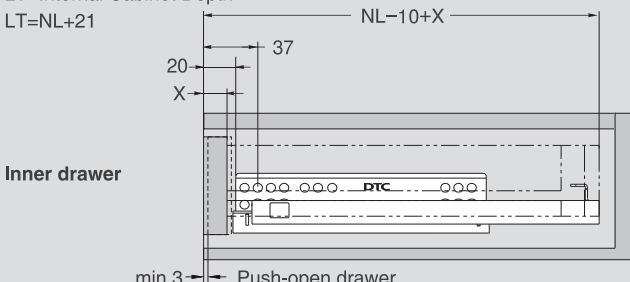

Inner drawer

min 3 → Push-open drawer

SOFT CLOSE DRAWER/PUSH-OPEN DRAWER

1





Slides (left/right)


Pre-zinc Steel (F02)

NL	 Soft close item No.	Set/ctn	 Push-open item No.	Set/ctn
450mm	TS81450H	10	TF81450H	6
480mm	TS81480H	10	TF81480H	6
500mm	TS81500H	10	TF81500H	6
520mm	TS81520H	10	TF81520H	6
550mm	TS81550H	10	TF81550H	6
580mm	TS81580H	10	TF81580H	6
600mm	TS81600H	10	TF81600H	6
650mm	TS81650H	10	TF81650H	6
700mm	TS81700H	10	TF81700H	6
750mm	TS81750H	10	TF81750H	6

	2D Locking Device (Left/Right)
Grey(H11)	
Item No.	0TSD01-A
2	3D Locking Device (Left/Right)
Grey(H11)	
Item No.	0TSD02-A
3	Rod for Push-open Synchronization (For cutting to size,1100mm. Cutting:Internal cabinet width LW-180)
Silver Grey(E18)	
Item No.	HT0FH02

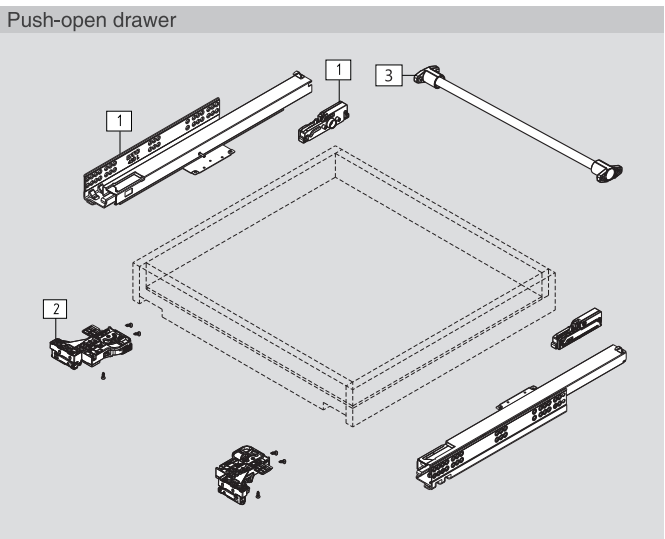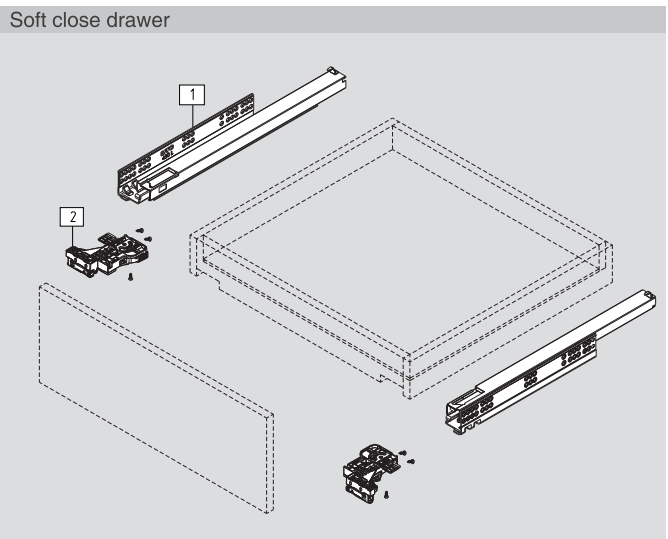

Screw Positions of the Slides(mm)

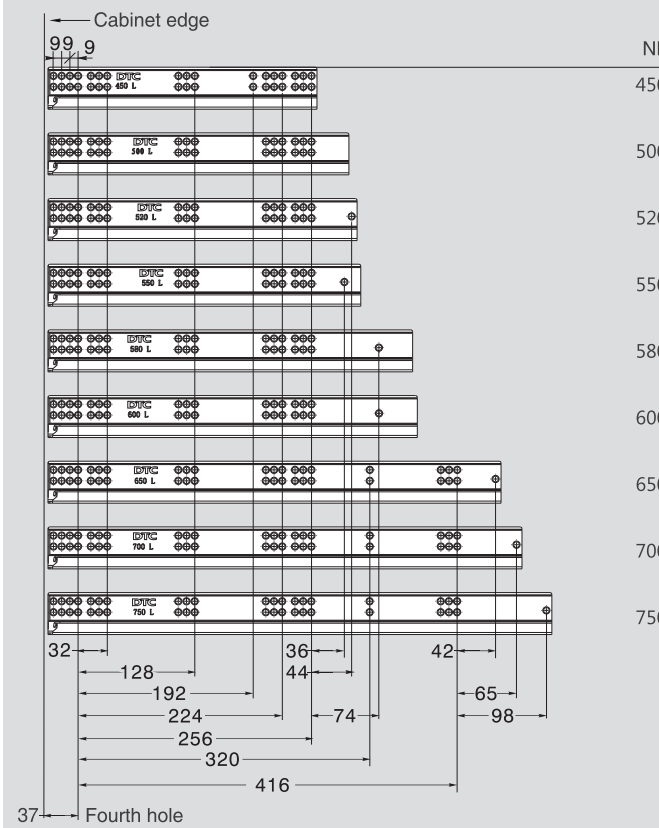

37 → Fourth hole


Cabinet edge

37 → Second hole

Fixing hole position for inner drawer


Installation Dimensions(mm)

SKW=Internal Drawer Width
LW=Internal Cabinet Width

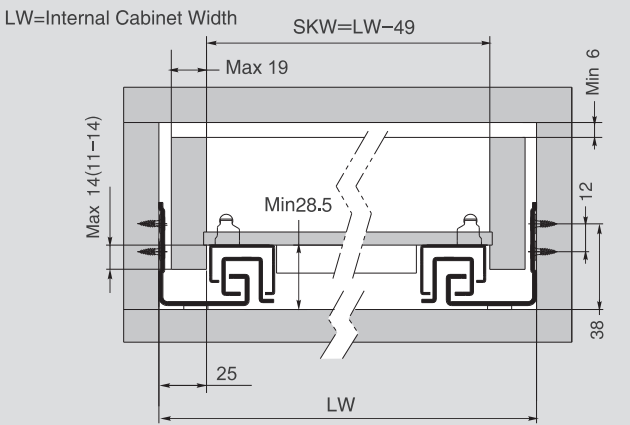


Drawer Back Preparation(mm)

Soft close drawer




Push-open drawer



Locking Device Installation(mm)

2D Locking Device



3D Locking Device

